

## 电磁阀 Solenoid Valve

### ■ 概论

内置重叠式或并联式电磁先导阀控制,工艺先进,动作可靠;

主阀膜片采用进口特制橡胶,强耐腐蚀,耐低温 -40 °C;

磁路部件采用特种不锈钢磁性材料,永不生锈或产生剩磁;

当工作压力在 0.3-0.4Mpa 时,关闭主阀,小流量系统为 3 ~ 3.5L/min ,可按用户要求设计。

### Main Features

Controlled by built-in overlapped or parallel-connected electromagnetic precursor valve, with advanced craft and reliable action;

Diaphragm of main valve adopts imported special rubber, with high anti-corrosion and resisting low temperature at -40°C;

Special stainless steel magnetic material never rust or generate remanent magnetism;

Close the main valve when the working pressure is 0.3-0.4MPa, and the small flow system will be 3-3.5L/min, which can be designed according to users' requirements.


## DSF-20F /25F 隔爆型双流量控制电磁阀 Flameproof two-flow control solenoid valve



### 技术参数 Technical Specification

产品型号 Type	dSF-20FA (dSF-20FB)	dSF- 25F
介质 Medium	汽油, 煤油, 柴油 Gasoline, Kerosene, Diesel	
工作压力 Working Pressure	0.035MPa----0.35MPa	
流量 Flow	3----50L/min	80 ~90L/min
工作电压 Working Voltage	AC220V AC110V DC24V DC12V	
尺寸 Diameter	20mm 3/4"	25mm 1"

## MSF-20F /25F 浇封型双流量控制电磁阀 (法兰连接) Casting two-flow control solenoid valve (flange connect)

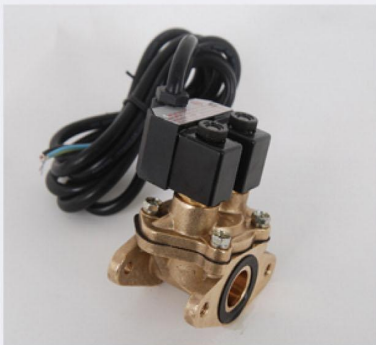

### 技术参数 Technical Specification

产品型号 Type	mSF-20FA ,mSF-20FB	mSF-25FA ,mSF-25FB
介质 Medium	汽油, 煤油, 柴油 Gasoline, Kerosene, Diesel	
工作压力 Working Pressure	0.035MPa~0.35MPa	
流量 Flow	3~50L/min	80 ~90L/min
工作电压 Working Voltage	AC220V AC110V DC24V DC12V	
尺寸 Diameter	20mm 3/4"	25mm 1"

## MSF-20N/25N 浇封型双流量控制电磁阀 (内螺纹)

### Casting Two-flow Control Solenoid Valve (Female Thread)



#### 技术参数 Technical Specification

产品型号 Type	mSF-20N	mSF-25N
介质 Medium	汽油, 煤油, 柴油 Gasoline, Kerosene, Diesel	
工作压力 Working Pressure	0.035MPa~0.35MPa	
流量 Flow	3~50L/min	80~90L/min
工作电压 Working Voltage	AC220V AC110V DC24V DC12V	
尺寸 Diameter	20mm 3/4"	25mm 1"

## MSF-20T/25T 浇封型双流量控制电磁阀 (外螺纹连接)

### Casting Two-flow Control Solenoid Valve (Male Thread)



#### 技术参数 Technical Specification

产品型号 Type	mSF-20T	mSF-25T
介质 Medium	汽油, 煤油, 柴油 Gasoline, Kerosene, Diesel	
工作压力 Working Pressure	0.035MPa~0.35MPa	
流量 Flow	3~50L/min	80~90L/min
工作电压 Working Voltage	AC220V AC110V DC24V DC12V	
尺寸 Diameter	20mm 3/4"	25mm 1"

## D50 大流量电磁阀

### High Flow Solenoid Valve



#### 技术参数 Technical Specification

介质 Medium	汽油, 煤油, 柴油 Gasoline, Kerosene, Diesel
工作压力 Working Pressure	0.035MPa~0.35MPa
CV值	48
工作电压 Working Voltage	AC220V AC110V DC24V DC12V
尺寸 Diameter	G2"